


IPC Motherboards MB896

Socket 479 Pentium® M Mini-ITX Motherboard w/ Intel® 915GM/910GML Chipset

Pentium® M-Based

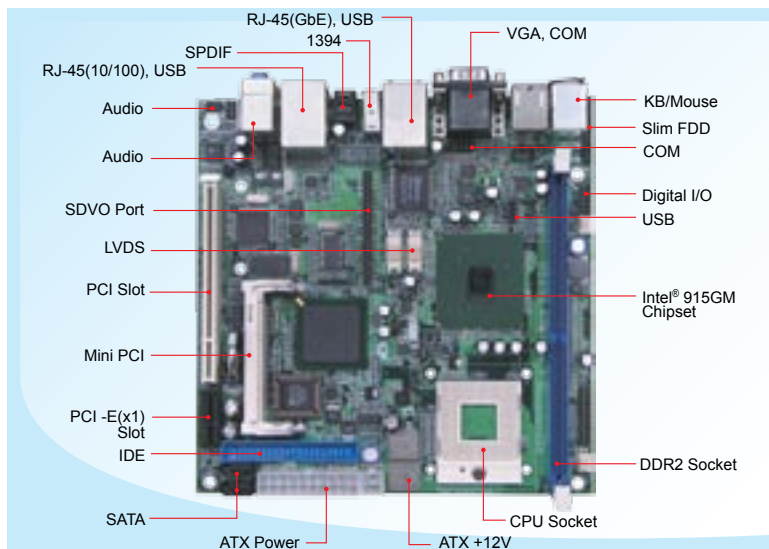

Features

- Supports Pentium® M / Celeron® M processors
Up to 2.26GHz, 400MHz/533MHz FSB
- DDR2 DIMM x 1, Max. 1GB
- Onboard 10/100 BaseT and optional Marvell PCI-E Gigabit Ethernet
- Integrated Intel® 915GM/910GML VGA for CRT, 18-bit dual channel LVDS
- 2 x SATA, 6 x USB 2.0, 2 x COM, Watchdog timer
- Optional 1394/CF socket, optional single/dual DVI card, 1 x PCI, 1 x Mini PCI, 1 x PCI-E(1) slots

System

CPU	Socket 479 for Pentium® M / Celeron® M Up to 2.26GHz
System Memory	DDR2 DIMM x 1, Max. 1GB
System Chipset	Intel® 915GM/910ML + ICH6M, 400MHz/533MHz FSB
BIOS	Award
Watchdog Timer	256 levels
SSD	Optional CF socket
H/W Monitor	Yes
Expansion Slot	1 PCI, 1 Mini PCI, 1 PCI-E(1)

Graphics

VGA Controller	Intel® 915GM/910GML integrated Graphics Media Accelerator 900 (GMA 900 graphics) for CRT and LVDS
VGA Memory	Supports DVM T 3.0; Max. shared memory - 128MB
LCD Interface	Supported by Intel® 915GM, 18-bit dual channel LVDS, Optional ID390 with Chrontel 7308 for 24-bit LVDS

Ethernet

Controller	Intel® 915GM/910GML integrated 10/100 BaseT LAN and optional Marvell 88E8053 PCI-E Gigabit LAN
Connector	RJ-45 on board

Multi I/O

Chipset	ICH6M, Winbond 83627EHF 1x IDE (UDMA33/66/100), 1x FDD, 1x KB, 1x Mouse, 2x RS-232, 2x SATA
USB	4 ports on board Pin header for 2 ports (USB 2.0)
Audio	Built-in audio + AC97 codec, NS LM4950 amplifier
Others	IrDA, 1394, ATX power connector

Mechanical and Environmental

Dimensions	170mm x 170mm (6.7" x 6.7")
Max. Power Requirement	CPU: Pentium® M 1.4GHz w/ 1GB DDR2 +5V: 1.32A +12V: 1.52A
Operating Temperature	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-68°F~176°F)
Relative Humidity	10%~90% (non-condensing)

Ordering Information

MB896-R	Socket 479 915GM Mini-ITX motherboard w/ VGA and 10/100 Ethernet (RoHS compliant)
MB896F-R	Socket 479 915GM Mini-ITX motherboard w/ VGA and 10/100, Gigabit Ethernet, 1394, CF (RoHS compliant)
MB896L-R	Intel® Celeron®, 1GHz, 910GML Mini-ITX motherboard w/ VGA and 10/100 Ethernet (RoHS compliant)
ID392-R	DVI daughter card w/ Chrontel 7307 controller, DVI connector on board (RoHS compliant)
ID392D-R	DVI daughter card w/ dual Chrontel 7307 controller, dual DVI connector on board
ID391-R	DVI daughter card with Chrontel 7307 controller, w/ DVI cable (RoHS compliant)
ID391D-R	DVI daughter card with dual Chrontel 7307 controller, w/ dual DVI cable (RoHS compliant)
ID390-R	LVDS (24-bit) daughter card w/ Chrontel 7308
ID390C-R	CRT2 daughter card with Chrontel 7021

For user's manual & datasheet download, visit www.ibase.com.tw