

Radiance®-T215

21.5" Industrial Display with Projected Capacitive Touchscreen



Features

- 21.5" Full HD TFT-LCD display
- IP65 Front
- Fanless Design
- Operating Temperature $-10^{\circ} \sim 50^{\circ} \text{C}$

TECHNICAL SPECIFICATIONS

Display	Type	21.5" TFT LCD
	Viewing Angle	89° H / 89° V
	Resolution	1920 x 1080
	Brightness	250 cd/m ²
	Contrast	1000 : 1
	Colors	16.7 Million
	Backlight Type	LED
	MTBF Backlight	30,000 hours
Touchscreen	Type	Projected capacitive 10 point Touch
	Connection	USB 2.0
	Light Transmittance	> 85%
	Life Time	10 Million activations
I/O	VGA	1X
	HDMI	1X
Power Supply	Input	9 ~ 28 VDC
	Connection	2 pin Phoenix
	External Power Supply	yes
Environment	Operating Temperature	$-10^{\circ} \sim 50^{\circ} \text{C}$
	Storage Temperature	$-20^{\circ} \sim 60^{\circ} \text{C}$
	Relative Humidity	10 ~ 95 % (non condensing)
	Vibration	1.5 Grms, random, 5 ~ 500 Hz, 1 hr/axis
	Shock	10 G, 11 ms duration
IP Protection		IP65 Front
Mechanical	Dimensions (W x H x D)	536.15 x 329.40 x 51 mm
	Cooling	Passive
	Mounting	Panel (cutout dimensions W x H: 520 x 313 mm), VESA 75

Radiance®-T215

21.5" Industrial Display with Projected Capacitive Touchscreen




Back




I/O

Technical Drawing

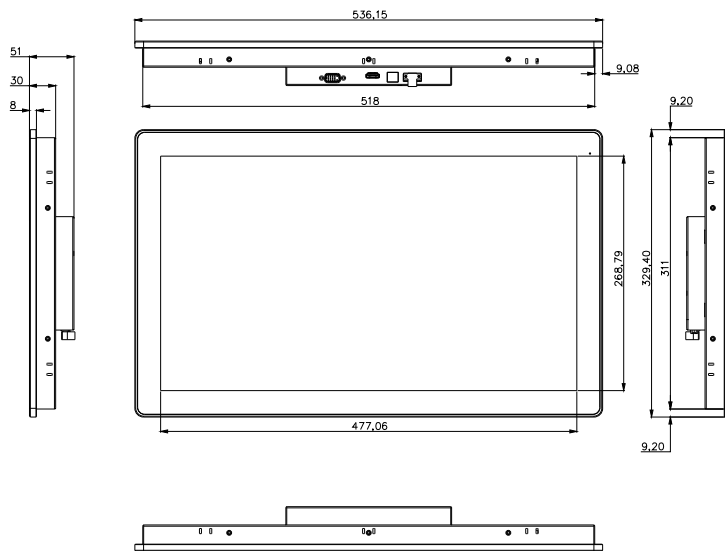

Unit: mm

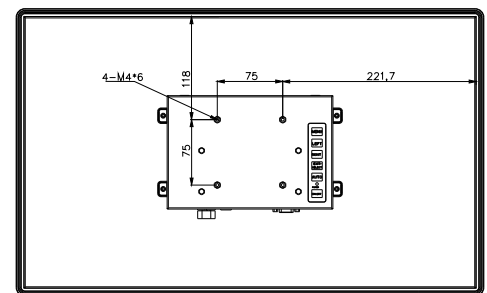

Cutout
Dimensions

InoNet Competences and Services



Consulting



Development



Testing



Customization



Manufacturing



Certifications

InoNet Computer GmbH
Wettersteinstraße 18
82024 Taufkirchen, Germany
www.inonet.com